

Description

Lax is HiRack LED Linear High Bay is designed for aisle in warehouse, generating rectangular lighting pattern perfectly complied with shape of aisles.

Key Features

- Perfect shape for warehouse
- Equiv. to Metal Halide lamps


Applications

- Warehouse
- Industrial Facility
- Exhibition Center
- Shopping Mall
- Gymnasium
- Stations


Specifications

Model No.	SLLHB01A030S	SLLHB01B060S	SLLHB01C090S	SLHB01D120S	SLLHB01E150S	SLLHB01F180S
Power Consumption	30W	60W	90W	120W	150W	180W
LED Type	Nichia SMD					
Luminous Flux up to	3900lm	7800lm	12150lm	16200lm	20250lm	24300lm
Efficacy (5K Ra70)	130 lm/W		135 lm/W			
Correlated Color Temperature	5000K (3000K, 4000K optional)					
Color Rendering Index	Ra70 (Ra80 optional)					
Beam Angle	801 802 803 804 805					
Driver Type	Driver Electronic inside					
Input Voltage	100-240 VAC / AC100-277V					
Power Factor	>0.93					
Frequency	50/60 Hz					
Surge Protection	2kV line-line, 4kV line-earth					
Product Dim. (mm)	280×137×102	486×137×102	718×137×102	948×137×102	1178×137×102	718×275×102
Net Weight	1.9±0.3kg	3.4±0.3kg	4.7±0.3kg	5.7±0.3kg	6.9±0.3kg	8.5±0.3kg
Carton Size (mm)	350×200×160	555×200×160	790×200×160	1020×200×160	1250×200×160	790×338×160
Material	Housing	Aluminum				
	Optics	PC Lens				
Finish	Powder Coating					
Fixture Color	Black/White/Black Body&Red Front					
Protection Rating	IP65					
Mounting Option	Loop Hanging Wall Mounting					
Operating Temperature	-30°C to + 50°C					
Life Time	>50,000Hrs (Ta=30°C@L70)					
Warranty	5 Years					
Intelligent control (optional)	Motion Sensor (final code -Q)					
	DALI (final code -D)					
	Zigbee control (final code -Z)					
	1-10V Dimmer (final code -V)					
	Emergency (final code -E)					
Accessory	safety line					
	triangle ceiling mount bracket					
	±50deg rotatable bracket					
	holding bracket for IP20 daylight sensor					


The values in this technical data sheet are to be considered subject to tolerances

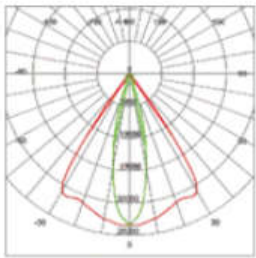


801

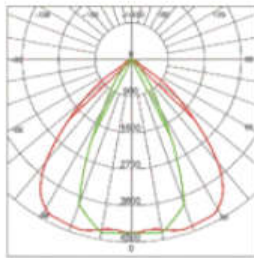


802

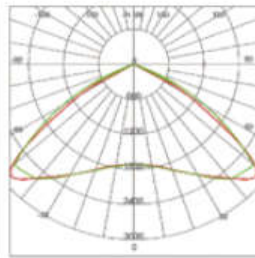

803

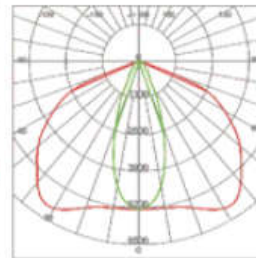

804

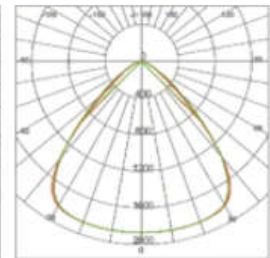

805

Mounting Options



Suspension mounting









Triangle ceiling mounting



± 50deg rotatable bracket mounting

Dimensions

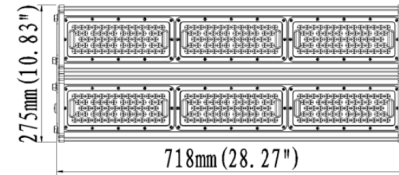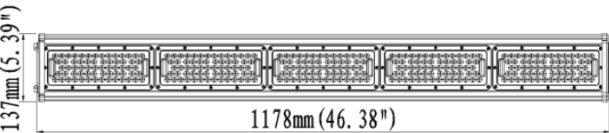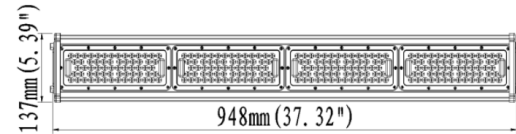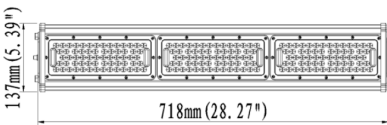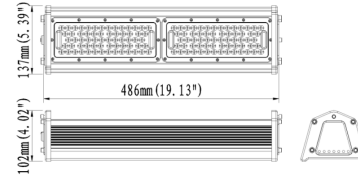

Accessories



±50deg adjustable bracket



non-adjustable bracket